


Speaker output	
Rated output power	120W + 120W (8Ω) 240W + 240W (4Ω)
Compatible speaker impedance	4Ω
Speaer terminal	1 set (L/R)
Analog audio inputs	
ES-Link Analog/XLR	3 pairs
Input impedance	10kΩ (XLR)
RCA	3 pairs
Input impedance	10kΩ
PHONO	1 pair (MM/MC switchable)
Input impedance	
MM	47kΩ
MC	100Ω

Analog audio outputs	
ES-Link Analog	1 pair
XLR	1 pair
Output impedance	100 Ω
Headphone outputs	
Standard 6.3mm (1/4) stereo jack	1
4-pin XLR jack	1
Maximum effective output	
Unbalanced	300mW + 300mW (into 32 Ω)
Balanced	600mW + 600mW (into 32 Ω)
Applicable load impedance	
Umbalanced	16 to 600 Ω
Balanced	32 to 600 Ω
Extrenal controls	

RS-232C	1
DC trigger input (TRIGGER IN)	1 (3.5mm mono mini jack)
DC trigger output (TRIGGER OUT)	1 (3.5mm mono mini jack)
General	
Power supply	
Model for US/Canada	AC 120V, 60Hz
Model for Europe/Hong Kong	AC 230V, 50Hz
Power consumption	280W 110W (no signal)
Standby power	0.3W (when RC-232C is OFF) 0.6W (when RC-232C is ON)
Overall dimensions (W×H×D)	445 × 191 × 471mm (including protrusions)
Weight	32.4kg
Included accessories	Power cord × 1 Remote control (RC-1339) × 1 Batteries (AA) × 2 Felt pads × 4

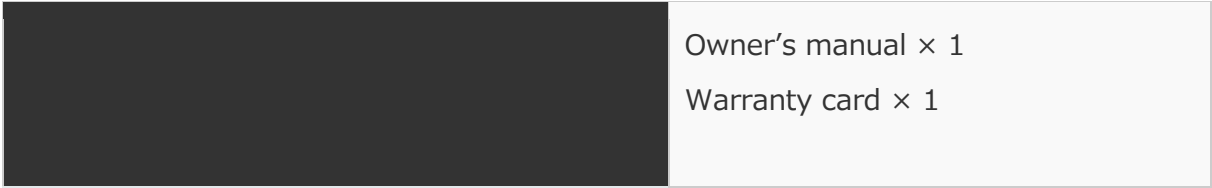

Owner's manual × 1

Warranty card × 1