

# marantz®



## SR6013 9.2 CHANNEL FULL 4K NETWORK AV RECEIVER WITH HEOS MUSIC STREAMING



The SR6013 offers a big step up from the SR5013, with nine channels of even more powerful amplification, 11.2-channel processing and preouts, and extended custom installation features including Crestron Connected compatibility. Selected discrete components including Marantz HDAMs ensure superb sonic performance with both music and movies. As standard the SR6013 can drive 5.1.4 or 7.1.2 speaker configurations, delivering all the immersive 3D sound of Dolby Atmos and DTS:X, and its 11.2-channel processing allows 7.1.4-channel working with the addition of an extra two-channel amplifier. An additional HDMI output allows audio and video to be sent to a second zone, as well as two displays – such as a TV and projector – in the main room.

### Highlights

### Your Benefits


9.2 channel AV Receiver with 185W per channel	Enough power to fill bigger rooms with renowned Marantz sound
Built-in WiFi with 2.4GHz/5GHz dual band support; built-in Bluetooth	Improved network stability especially in WiFi-crowded homes
4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR and BT.2020, plus Dolby Vision compatibility and Hybrid Log Gamma (HLG)	Latest HDMI standard for future-proof compatibility
8 HDMI inputs (incl. 1 front) with full HDCP 2.2 support; 3 HDMI outputs	Extended connectivity; 2 main zone HDMI outputs + 1 zone output
Analogue to HDMI conversion and full rate 4K Upscaling	Full HD and even Ultra HD video quality from existing video sources
eARC (Enhanced Audio Return channel; via future firmware update)	Dolby Atmos/DTS:X from TV broadcasts over HDMI connection
Dolby Atmos (up to 7.1.4 with add. 2ch amplifier) and DTS:X	Immersive 3D sound with effects from overhead
Audiophile 32-bit D/A converters; HDAM; Current Feedback circuitry;	For the most accurate and detailed audio reproduction
AirPlay 2, Bluetooth, Internet Radio, Spotify Connect, Network Audio Streaming	Access to almost unlimited online music sources
DSD (2.8/5.6MHz), FLAC, ALAC and WAV support	High Resolution audio streaming, even gapless
Integrated high-quality Phono input	Connect your turntable and listen to your beloved Vinyls
Amazon Alexa voice control via the HEOS Home Entertainment skill	Control main functions of your AVR with your voice (not available in all countries)
Audyssey MultEQ XT32, Dynamic Volume and Dynamic EQ, LFC, Sub EQ HT	Delivering the most advanced equalization for your individual room
Colour-coded speaker terminals, Setup Assistant, Marantz AVR Remote App	Hassle-free installation, setup and operation
Intelligent ECO mode with off/on/auto setting	Energy-conscious without compromising on performance



# because music matters

## SR6013

### 9.2 CHANNEL FULL 4K NETWORK AV RECEIVER WITH HEOS MUSIC STREAMING

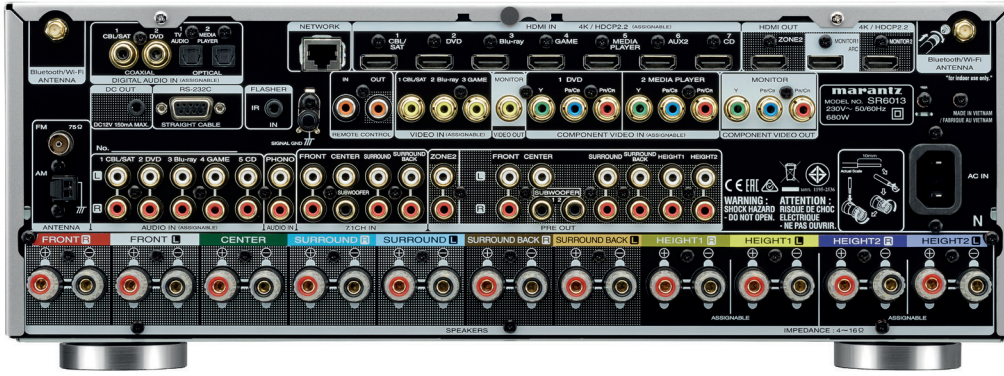

Design and specifications are subject to change by Marantz without notice.

FEATURES	SR6013
<b>MULTICHANNEL SURROUND</b>	
DTS HD Master / DTS:X / DTS Neural:X	• / • / •
DTS Virtual:X	•
Dolby TrueHD / Dolby Atmos / Dolby Surround	• / • / •
Multichannel Stereo	•
Compressed audio Enhancer: MDAX2	•
Audyssey	MultEQ XT32 with LFC/Sub EQ HT
Audyssey Dynamic EQ / Dynamic Volume	• / •
Audyssey MultEQ Editor App support	•
<b>NETWORK / SOURCES</b>	
Network Audio Streaming	•
HEOS Multiroom integrated	•
Lossy formats MP3 / WMA / AAC	• / • / •
Lossless formats FLAC / ALAC / WAV	• / • / •
DSD Streaming	• (2.8 MHz / 5.6 MHz)
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
Gapless playback	• (FLAC, WAV, ALAC, DSD)
AirPlay 2	•
Internet Radio (Tuneln)	•
Spotify Connect, Deezer, TIDAL, Napster, Soundcloud *	• / • / • / • / • / •
Compatible with Remote APP for Smart Phones	Android/iOS
Ethernet / Wi-Fi	• / • (dual antenna / dual band)
Network: (IP-control / update)	• / •
Front Inputs: HDMI / USB	• / •
USB Audio	•
FM / AM Tuner	• / •
Bluetooth	•
<b>HDMI</b>	
4K 60Hz 4:4:4 resolution / HDCP 2.2	• / •
eARC (Enhanced Audio Return Channel)	•
Dolby Vision compatible / Hybrid Log Gamma (HLG)	• / •
HDMI pass through on stand-by	•
3D video pass through	•
Video conversion	CVBS / HDMI; Comp / HDMI
Video processing and -scaling	1080p, 4K 60/50Hz

\* This feature is not available in all countries.

D&M Europe B.V.  
A Division of Sound United  
Beemdstraat 11  
5653 MA Eindhoven  
The Netherlands

INPUTS/OUTPUTS	
<b>VIDEO</b>	
Composite In / Out	3+1 / 1
Component In / Out	2 / 1
HDMI In / Out	7+1 / 2 main + 1 zone out
<b>AUDIO</b>	
Analogue In / Out	5+1 / 0 (incl. Phono)
Digital Optical In	2
Digital Coaxial In	2
Multichannel Pre Out	• (11.2 with 11.2 processing)
Zone audio preout	•
Subwoofer Out	2
7.1 Multichannel input	•
<b>SPECIFICATIONS</b>	
Number of poweramps	9
Power Output per channel	
6 ohm, 1 kHz, 1%, 1ch Drive	185 W
6 ohm, 1 kHz, 0.7%, 2ch Drive	150 W
8 ohm, 20 Hz - 20 kHz, 0.08%, 2ch Drive	110 W
Audio Signal to Noise Ratio	102 dB
<b>GENERAL</b>	
Available colours: Black / Silver-Gold	• / •
System Remote Control	RC035SR
Power Consumption in W	680
Power Consumption No-Sound (ECO ...on/off) in W	50 / 80
Standby Consumption in W	0.2 (with CEC 0.5)
Maximum Dimensions (W x D x H) in mm	440 x 398 x 161
Weight in kg	12.7
<b>EAN</b>	
<b>EU</b>	SR6013/N1B 4951035066003 Black
	SR6013/N1SG 4951035066034 Silvergold
<b>UK</b>	SR6013/T1B 4951035066522 Black
	SR6013/T1SG 4951035066539 Silvergold

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](http://www.spotify.com/connect/third-party-licenses). Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

\* All specs can be subject to change.